

Threaded DIAPHRAGM SEAL

RÜEGER

FT DS-410

Sole agent in Indonesia : PT. Instrumentation Engineering and Services (08111371371)

RS-T2

- Designed specifically to protect gauges from viscous and corrosive media, plugging or freezing of the pressure sensing element.
- Laser welded diaphragm. forged chambers and rigid construction.



SCALE RANGES

Type A: -1...0 to 0...70 bar

Type B: 0...100 to 0...160 bar

Type C: 0...210 to 0...400 bar

STANDARD FEATURES

UPPERPART

Stainless steel AISI 316

DIAPHRAGM

Stainless steel AISI 316L

LOWER PART

Stainless steel AISI 316L

PROCESS CONNECTION

1/4" or 1/2" NPT or BSP - M/F,
etc

INSTRUMENT CONNECTION


1/2" NPT or BSP - F Direct or
Capillary (316SS)

FILLING FLUID

Silicon DC200 (-40 °C / + 205 °C)

OPTIONAL EXTRAS

Filling fluid:
silicon oil (+20 °C / + 340 °C)
fluorolube oil
Oil for food industry
Monel or hastelloy C276 wetted
parts available

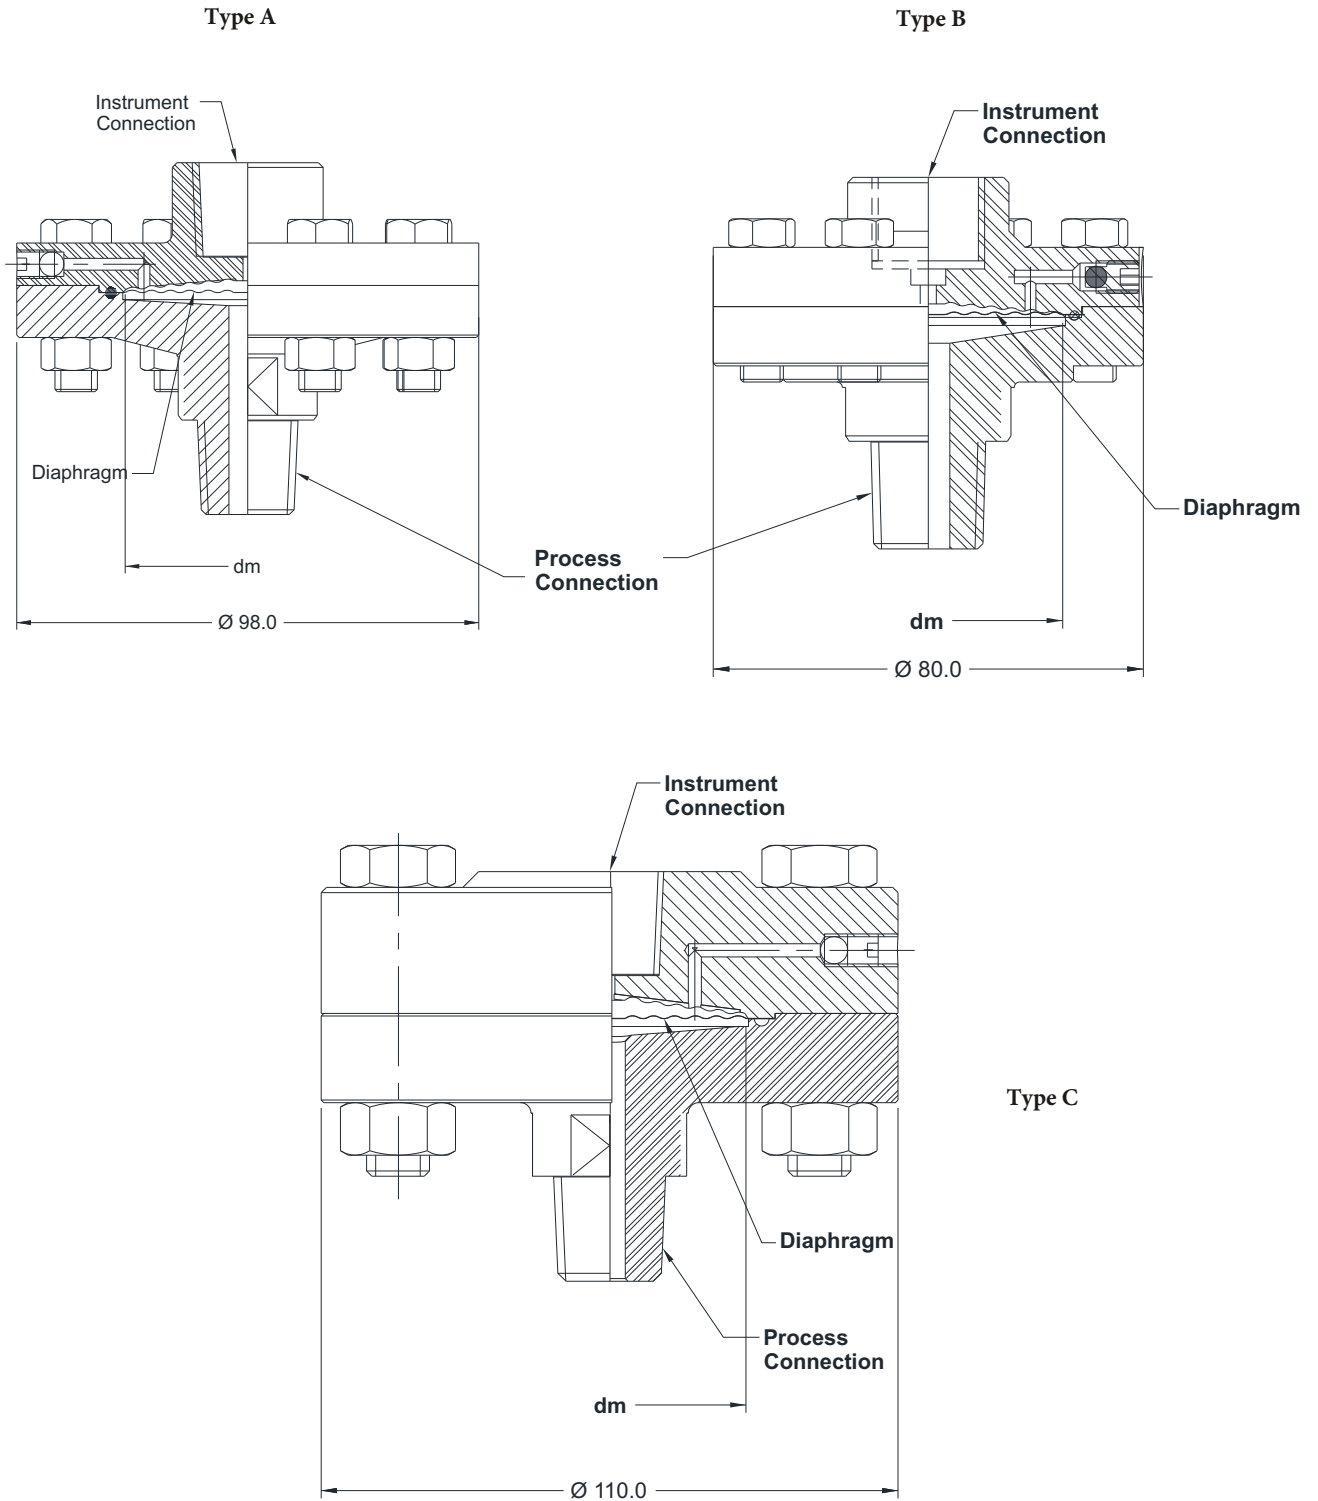

Modifications reserved

RÜEGER



www.rueger.com www.instrugate.com

Manufacturers of Sensors and Gauges for Temperature & Pressure

RÜEGER SA

Ch. de Mongevon 9
Case postale 98
1023 CRISSIER 1
SWITZERLAND

RÜEGER GmbH

Plieninger Strasse 58
70567 STUTTGART
GERMANY

RÜEGER Sdn Bhd

No. 22-5, Jalan Wangsa Delima 10
D'Wangsa, Wangsa Maju
53300 KUALA LUMPUR
MALAYSIA

Tel + 41 (0)21 637 32 32
Fax + 41 (0)21 637 32 00
E-mail info@rueger.ch

Tel + 49 (0)711 16-163-0
Fax + 49 (0)711 16-16333
E-mail rgmbh@rueger.com

Tel + 603 - 4142 3808
Fax + 603 - 4142 3909
E-mail sales@rueger.com.my